

L-TWO

2025-2026

CATALOGUE
产品目录



珠海蓝图运动科技股份有限公司
ZHUHAI L-TWO SPORT TECHNOLOGY CO.,LTD

2025 NEW PRODUCT

eTX

ETX 系列，采用了全无线式的设计模式，这意味着骑手们将与繁琐的安装过程，彻底告别。

The ETX series features a fully wireless design, allowing riders to completely say goodbye to complicated installation processes.



后拨满电量支持超 8000 次变速，采用可拆卸式的后拨电池，并搭载 TYPE-C 充电接口，将使充电变得极为简单。

稳定阻尼系统，能够吸收颠簸路面所带来的冲击，避免了因剧烈的抖动，而导致的链条脱落。

The rear derailleur supports over 8,000 shifts on a full charge, features a detachable battery, and is equipped with a TYPE-C charging port, making recharging incredibly simple.

Stable damping system absorbs shocks from rough terrain, preventing chain drops caused by intense vibrations.



指拨采用 CR2032 纽扣电池进行供电，双向角度可调节。
采用合页式安装夹环，安装时无需拆卸车把。

刹车手柄同样采用合页式夹环设计，可通过旋转行程调节螺钉，对刹车手柄行程进行调节。

The shifter is powered by a CR2032 battery and features bidirectional angle adjustment. It uses a hinged mounting clamp, allowing installation without removing the handlebar.

The brake lever also adopts a hinged clamp design, and the lever travel can be adjusted by rotating the reach adjustment screw.



SL-ET1210

Speed: 10-12S
Installation: Two sides compatible clamp
Main material: Composite plastic
Powered: CR2032 battery

速别: 10-12 速
安装位置: 双向夹环, 左右均可安装
主体材料: 复合纤维
供电: CR2032 纽扣电池



RD-ET1210

Damped Chain Stabilizer

Speed: 10-12S
Main material: Aluminum
Cage material: Aluminum
Max gear range: 10/11-46/52T

阻尼稳定系统

速别: 10-12 速
主体材料: 铝合金
导板: 铝合金
兼容齿数: 10/11-46/52T



BL-M4000-R

Brake type: Hydraulic disc brakes
Main material: Aluminum
Travel adjustment: Yes
Power-cut: Yes
Handle size: 2 finger
Funnel oil filling: Yes

BL-M4000-L

刹车方式: 碟刹
材质: 铝合金
握距调节: 支持 (无需工具)
断电功能: 支持
手柄尺寸: 2 指
漏斗注油: 支持



BL-M4002-R

Brake type: Hydraulic disc brakes
Main material: Aluminum
Travel adjustment: Yes (Without tools)
Power-cut: Yes
Handle size: 3 finger
Funnel oil filling: Yes

BL-M4002-L

刹车方式: 碟刹
材质: 铝合金
握距调节: 支持 (无需工具)
断电功能: 支持
手柄尺寸: 3 指
漏斗注油: 支持



M4000-F

Brake type: Disc brake
Pistons number: 2
Main material: Aluminum
Pads: Linear cooling brake pads
Installation method: B-pillar

M4000-R

刹车方式: 碟刹
活塞数: 2
材质: 铝合金
来令片: 条形散热来令片
安装方式: B 柱



M4001-F

Brake type: Disc brake
Pistons number: 4
Main material: Aluminum
Pads: Linear cooling brake pads
Installation method: B-pillar

M4001-R

刹车方式: 碟刹
活塞数: 4
材质: 铝合金
来令片: 条形散热来令片
安装方式: B 柱

INTERNALLY GEARED HUB

内变速花鼓 5 SPEED



SG-C5000-5

Shifting type: Mechanical shifting
Brake type: Disc brake
Speed: 5-speed
O.L.D: 135mm
Spoke size: #13/#14
Spoke holes: 32H
Axle length: 182mm
Flange distance: 57mm
Flange diameter: 114mm
Flange width: 3.7mm
Offset: 3.7mm
P.C.D: 104mm
Material: Aluminum
Weight: 2.2kg

变速方式: 机械变速
刹车方式: 碟刹
速别: 5
锁紧螺母间距: 135mm
辐条尺寸: #13/#14
辐条孔: 32H
总长: 182mm
法兰距离: 57mm
法兰直径: 114mm
法兰宽度: 3.7mm
偏移量: 3.7mm
节圆直径: 104mm
材质: 铝合金
重量: 2.2kg



SL-C5000-5

Shifting type: Mechanical shifting
Speed: 5-speed
Material: Aluminum

变速方式: 机械变速
速别: 5
材质: 铝合金



SL-EC5000-5

Shifting type: Electronic shifting
Brake type: Disc brake
Speed: 5-speed
O.L.D: 135mm
Spoke size: #13/#14
Spoke holes: 32H
Axle length: 182mm
Flange distance: 57mm
Flange diameter: 114mm
Flange width: 3.7mm
Offset: 3.7mm
P.C.D: 104mm
Material: Aluminum
Weight: 2.2kg

变速方式: 电子变速
刹车方式: 碟刹
速别: 5
锁紧螺母间距: 135mm
辐条尺寸: #13/#14
辐条孔: 32H
总长: 182mm
法兰距离: 57mm
法兰直径: 114mm
法兰宽度: 3.7mm
偏移量: 3.7mm
节圆直径: 104mm
材质: 铝合金
重量: 2.2kg



SL-E9001

Speed: 10-12S
Control method: Wireless
Main material: Aluminum
Button angle: 18° adjustment
Weight: 80g

速别: 10-12 速
控制方式: 无线
主体材料: 铝合金
按键角度: 支持 18° 范围调节
重量: 80g

T series

阻尼山地 Damping Mountain Bike

T 系列是专为中高端山地自行车而设计的单盘变速套件，具备出色的耐用性和操控性能。

后拨方面：

T 系列配备了链条稳链阻尼系统，能够有效吸收路面颠簸带来的冲击，减少链条抖动，防止掉链情况的发生，确保骑行过程中的稳定性和可靠性。

指拨方面：

T 系列采用了双向释放技术，使得变速操作更加灵活便捷。无论是升档还是降档，骑行者都能轻松完成，进一步提升骑行体验。

T 系列通过这两项核心技术的优化，为山地骑行提供了更顺畅、更可靠的变速表现。

The T series is a single-chainring drivetrain system specifically designed for mid-to-high-end mountain bikes, offering outstanding durability and handling performance.

Rear Derailleur:

The T series is equipped with a Chain Stabilization Damping System, which effectively absorbs shocks caused by rough terrain, reduces chain vibrations, and prevents chain drops. This ensures stability and reliability during rides.

Shifters:

The T series features Two-Way Release Technology, making shifting operations more flexible and convenient. Whether upshifting or downshifting, riders can perform shifts effortlessly, further enhancing the riding experience.

With these two core technologies optimized, the T series delivers smoother and more reliable shifting performance for mountain biking.

TX
1x12 SPEED

T9
1x11 SPEED

T7
1x10 SPEED

T5
1x9 SPEED

T3
1x8 SPEED

T2
1x7 SPEED



TX

TX CARBON 碳纤维 1x12 SPEED



SL-T1220

Two-Way Release

Speed: 12S
Side: Right
Main material: Aluminum
Lever material: Carbon
Weight: 120g

双向释放

速别: 12 速
安装位置: 右
主体材料: 铝合金
拨杆材料: 碳纤维
重量: 120g



RD-T1220

Damped Chain Stabilizer

Speed: 12S
Main material: Aluminum
Cage material: Carbon (Outside)
Cage length: Long (83mm)
Max gear range: 10/11-46/52T
Damping system: Yes
Weight: 265g

阻尼稳定系统

速别: 12 速
主体材料: 铝合金
外导板: 碳纤维
导板长度: L(轴距: 83mm)
兼容齿数: 10/11-46/52T
阻尼系统: 有
重量: 265g

TX Aluminum 铝合金 1x12 SPEED



SL-T1210

Two-Way Release

Speed: 12S
Side: Right
Main material: Aluminum
Lever material: Composite plastic
Weight: 122g

双向释放

速别: 12 速
安装位置: 右
主体材料: 铝合金
拨杆材料: 复合塑料
重量: 122g



RD-T1210

Damped Chain Stabilizer

Speed: 12S
Main material: Aluminum
Cage material: Aluminum
Cage length: Long (83mm)
Max gear range: 10/11-46/52T
Damping system: Yes
Weight: 282g

阻尼稳定系统

速别: 12 速
主体材料: 铝合金
外导板: 铝合金
导板长度: L(轴距: 83mm)
兼容齿数: 10/11-46/52T
阻尼系统: 有
重量: 282g



CS-A12

12SP CASSETTE

Size A: 11-13-15-18-21-23-26-30-34-40-46-52T
Size B: 11-13-15-17-19-21-24-28-32-36-42-50T
Size C: 11-13-15-17-19-21-24-28-33-36-40-46T

Cassettes material: Steel
Surface treatment: Nickel plating

飞轮材料: 钢
表面处理: 镀镍

T9

T9 Aluminum 铝合金 1x11 SPEED



SL-T1110

Two-Way Release

Speed: 11S
Side: Right
Main material: Aluminum
Lever material: Composite plastic
Color: Gray-blue
Weight: 122g

双向释放

速别: 11 速
安装位置: 右
主体材料: 铝合金
拨杆材料: 复合塑料
颜色: 蓝灰
重量: 122g



RD-T1110

Damped Chain Stabilizer

Speed: 11S
Main material: Aluminum
Cage material: Aluminum
Cage length: Long (83mm)
Max gear range: 10/11-42/50T
Damping system: Yes
Weight: 282g

阻尼稳定系统

速别: 11 速
主体材料: 铝合金
导板材料: 铝合金
导板长度: L (轴距: 83mm)
兼容齿数: 10/11-42/50T
阻尼系统: 有
重量: 282g

T9 1x11 SPEED



SL-T1100

Two-Way Release

Speed: 11S
Side: Right
Main material: Aluminum
Lever material: Composite plastic
Color: Black
Weight: 122g

双向释放

速别: 11 速
安装位置: 右
主体材料: 铝合金
拨杆材料: 复合塑料
颜色: 黑
重量: 122g



RD-T1100

Damped Chain Stabilizer

Speed: 11S
Main material: Aluminum
Cage material: Steel
Cage length: Long (83mm)
Max gear range: 10/11-42/50T
Damping system: Yes
Weight: 350g

阻尼稳定系统

速别: 11 速
主体材料: 铝合金
导板材料: 铁
导板长度: L (轴距: 83mm)
兼容齿数: 10/11-42/50T
阻尼系统: 有
重量: 350g



CS-A11

11SP CASSETTE

Size A: 11-13-15-18-21-23-26-30-34-40-46T
Size B: 11-13-15-19-21-24-28-32-36-42-50T

Cassettes material: Steel
Surface treatment: Nickel plating

飞轮材料: 钢
表面处理: 镀镍



T7 1x10 SPEED



SL-T1000-10W

Two-Way Release

Speed: 10S
Side: Right
Main material: Composite plastic
Lever material: Composite plastic
Window indicator: Yes
Weight: 126g (R)

双向释放

速别: 10 速
安装位置: 右
主体材料: 复合塑料
拨杆材料: 复合塑料
视窗指示: 有
重量: 126g(右)



RD-T1000-S

Damped Chain Stabilizer

Speed: 10S
Main material: Aluminum
Cage material: Steel
Cage length: Short (63mm)
Max gear range: 11-42/46T
Damping system: Yes
Weight: 335g

阻尼稳定系统

速别: 10 速
主体材料: 铝合金
导板材料: 铁
导板长度: S (轴距: 63mm)
兼容齿数: 11-42/46T
阻尼系统: 有
重量: 335g

RD-T1000-L

Damped Chain Stabilizer

Speed: 10S
Main material: Aluminum
Cage material: Steel
Cage length: Long (83mm)
Max gear range: 11-46T
Damping system: Yes
Weight: 350g

阻尼稳定系统

速别: 10 速
主体材料: 铝合金
导板材料: 铁
导板长度: L (轴距: 83mm)
兼容齿数: 11-46T
阻尼系统: 有
重量: 350g



CS-A7

10SP CASSETTE

Size A: 11-13-15-18-21-24-30-36-40-42T
Size B: 11-13-15-18-21-24-28-34-42-46T

Cassettes material: Steel
Surface treatment: Nickel plating

飞轮材料: 钢
表面处理: 镀镍



SL-T900-9W

Speed: 9S
Side: Right
Main material: Composite plastic
Lever material: Composite plastic
Window indicator: Yes
Weight: 126g

速别: 9速
安装位置: 右
主体材料: 复合塑料
拨杆材料: 复合塑料
视窗指示: 有
重量: 126g



RD-T900-S

Damped Chain Stabilizer

Speed: 9S
Main material: Aluminum
Cage material: Steel
Cage length: Short (63mm)
Max gear range: 11-42T
Damping system: Yes
Weight: 335g

阻尼稳定系统

速别: 9速
主体材料: 铝合金
导板材料: 铁
导板长度: S (轴距: 63mm)
兼容齿数: 11-42T
阻尼系统: 有
重量: 335g

RD-T900-L

Damped Chain Stabilizer

Speed: 9S
Main material: Aluminum
Cage material: Steel
Cage length: Long (83mm)
Max gear range: 11-42T
Damping system: Yes
Weight: 350g

阻尼稳定系统

速别: 9速
主体材料: 铝合金
导板材料: 铁
导板长度: L (轴距: 83mm)
兼容齿数: 11-42T
阻尼系统: 有
重量: 350g



CS-A5

9SP CASSETTE

Size A: 11-13-15-18-21-24-28-32-36T
Size B: 11-13-15-18-21-23-30-34-40T
Size C: 11-13-15-17-19-24-28-36-42T

Cassettes material: Steel
Surface treatment: Nickel plating

飞轮材料: 钢
表面处理: 镀镍



SL-T800-8W

Speed: 8S
Side: Right
Main material: Composite plastic
Lever material: Composite plastic
Window indicator: Yes
Weight: 126g

速别: 8速
安装位置: 右
主体材料: 复合塑料
拨杆材料: 复合塑料
视窗指示: 有
重量: 126g



RD-T800-S

Damped Chain Stabilizer

Speed: 8S
Main material: Aluminum
Cage material: Steel
Cage length: Short (63mm)
Max gear range: 11-42T
Damping system: Yes
Weight: 335g

阻尼稳定系统

速别: 8速
主体材料: 铝合金
导板材料: 铁
导板长度: S (轴距: 63mm)
兼容齿数: 11-42T
阻尼系统: 有
重量: 335g

RD-T800-L

Damped Chain Stabilizer

Speed: 8S
Main material: Aluminum
Cage material: Steel
Cage length: Long (83mm)
Max gear range: 11-42T
Damping system: Yes
Weight: 350g

阻尼稳定系统

速别: 8速
主体材料: 铝合金
导板材料: 铁
导板长度: L (轴距: 83mm)
兼容齿数: 11-42T
阻尼系统: 有
重量: 350g



CS-A3

8SP CASSETTE

Size A: 11-13-15-18-21-24-30-36T
Size B: 11-13-15-17-19-24-36-42T

Cassettes material: Steel
Surface treatment: Nickel plating

飞轮材料: 钢
表面处理: 镀镍



SL-T700-7W

Speed: 7S
Side: Right
Main material: Composite plastic
Lever material: Composite plastic
Window indicator: Yes
Weight: 126g

速别: 7 速
安装位置: 右
主体材料: 复合塑料
拨杆材料: 复合塑料
视窗指示: 有
重量: 126g



RD-T700-S

Damped Chain Stabilizer

Speed: 7S
Main material: Aluminum
Cage material: Steel
Cage length: Short (63mm)
Max gear range: 11-42T
Damping system: Yes
Weight: 335g

阻尼稳定系统

速别: 7 速
主体材料: 铝合金
导板材料: 铁
导板长度: S (轴距: 63mm)
兼容齿数: 11-42T
阻尼系统: 有
重量: 335g

RD-T700-L

Damped Chain Stabilizer

Speed: 7S
Main material: Aluminum
Cage material: Steel
Cage length: Long (83mm)
Max gear range: 11-42T
Damping system: Yes
Weight: 350g

阻尼稳定系统

速别: 7 速
主体材料: 铝合金
导板材料: 铁
导板长度: L (轴距: 83mm)
兼容齿数: 11-42T
阻尼系统: 有
重量: 350g

A series

经典山地 Classical Mountain Bike

A 系列是专为入门级山地自行车设计的变速套件，以其多样化的搭配选择和可靠的性能，成为初学者的最佳选择。

A 系列提供了丰富的配置组合，包括转把、刹车变速一体指拨等多种操作方式，满足不同骑行者的需求和偏好，让入门车手能够轻松找到适合自己的操控方式。

在性能方面，A 系列以稳定性和性价比为核心，确保在各种路况下都能提供顺畅的变速体验。其精心设计的结构能够有效应对日常骑行中的挑战，减少故障率，让骑行者更加专注于享受骑行乐趣。

The A series is a drivetrain system specifically designed for entry-level mountain bikes, making it the ideal choice for beginners with its versatile combination options and reliable performance.

The A series offers a wide range of configurations, including grip shifters and brake-shift combo levers, catering to the diverse needs and preferences of riders. This allows novice cyclists to easily find a control style that suits them best.

In terms of performance, the A series focuses on stability and cost-effectiveness, ensuring smooth shifting experiences across various terrains. Its thoughtfully designed structure effectively handles the challenges of everyday riding, reducing failure rates and allowing riders to focus more on enjoying their cycling experience.

AX

1x12 SPEED 2x12 SPEED

A9

1x11 SPEED 2x11 SPEED

A7

1x10 SPEED 2x10 SPEED 3x10 SPEED

A5

1x9 SPEED 2x9 SPEED 3x09 SPEED

A3


1x8 SPEED 2x8 SPEED 3x8 SPEED

A2

1x7 SPEED 2x7 SPEED 3x7 SPEED

A1

1x6 SPEED 3x06 SPEED

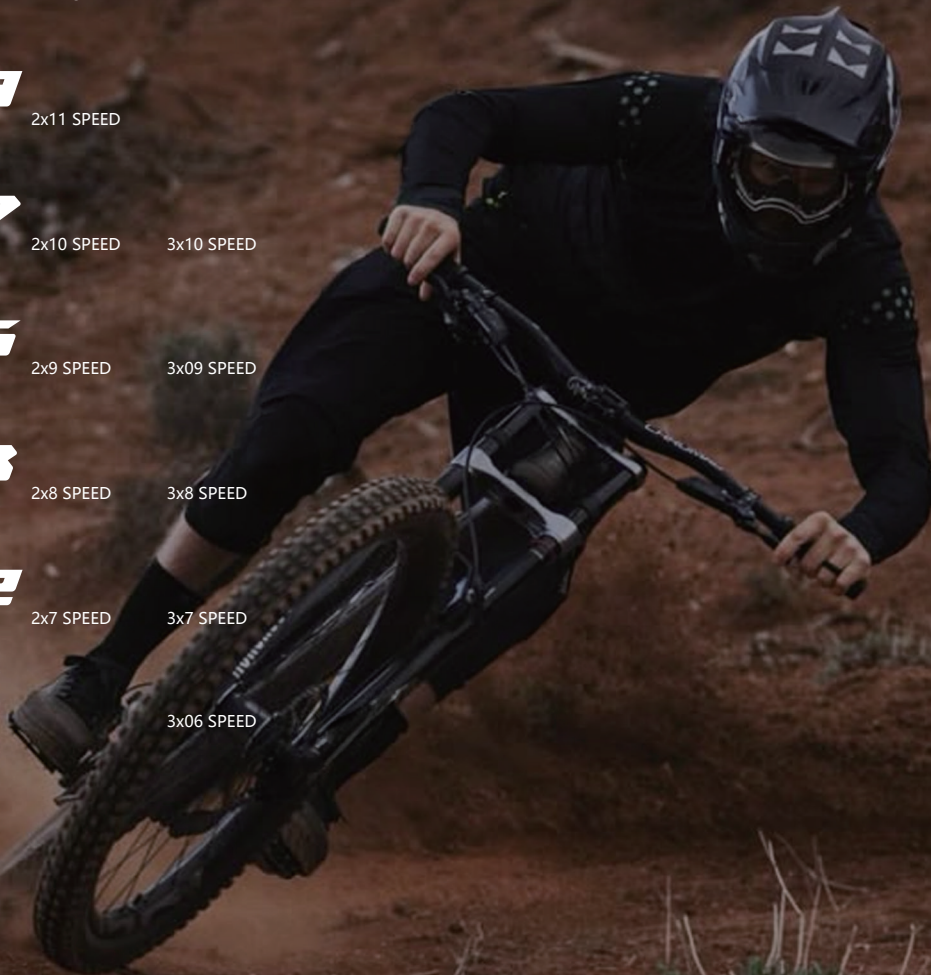



AX Aluminum 铝合金 1x12 SPEED



SL-A1210

Speed: 12S
Side: Right
Main material: Composite plastic
Lever material: Composite plastic
Window indicator: No
Weight: 139g

速别: 12 速
安装位置: 右
主体材料: 复合塑料
拨杆材料: 复合塑料
视窗指示: 无
重量: 139g



SL-A1200-12W

Speed: 12S
Side: Right
Main material: Composite plastic
Lever material: Composite plastic
Window indicator: Yes
Weight: 126g

速别: 12 速
安装位置: 右
主体材料: 复合塑料
拨杆材料: 复合塑料
视窗指示: 有
重量: 126g



RD-A1211

Speed: 12S
Main material: Aluminum
Cage material: Aluminum
Cage length: Long (83mm)
Max gear range: 11-52T
Weight: 285g

速别: 12 速
主体材料: 铝合金
导板材料: 铝合金
导板长度: L (轴距: 83mm)
兼容齿数: 11-52T
重量: 285g

AX 1x12 SPEED



SL-A1200

Speed: 12S
Side: Right
Main material: Composite plastic
Lever material: Composite plastic
Window indicator: No
Weight: 139g

速别: 12 速
安装位置: 右
主体材料: 复合塑料
拨杆材料: 复合塑料
视窗指示: 无
重量: 139g



RD-A1201

Speed: 12S
Main material: Aluminum
Cage material: Steel
Cage length: Long (83mm)
Max gear range: 11-52T
Weight: 336g

速别: 12 速
主体材料: 铝合金
导板材料: 铁
导板长度: L (轴距: 83mm)
兼容齿数: 11-52T
重量: 336g



AX 2x12 SPEED



SL-A1200-2

Speed: 2x12S
Main material: Aluminum
Lever material: Composite plastic
Window indicator: No
Weight: 139g

SL-A1200

速别: 2x12 速
主体材料: 铝合金
拨杆材料: 复合塑料
视窗指示: 无
重量: 139g



FD-A24L-2

Speed: 2S
Mounting: Low clamp
Spacer: 31.8-34.9mm
Operation mode: Dual pull
Chain stay angle: 66° -69°
Max gear range: 42T
Capacity: 14T
Chainline: 49.5-51.5mm
Weight: 149g

速别: 双盘
安装方式: C型 低夹环
变径套: 31.8-34.9mm
拉线方式: 双拉
安装角度: 66° -69°
兼容齿数: 42T
齿容量: 14T
链线: 49.5-51.5mm
重量: 149g



RD-A1202-LX

Speed: 12S
Main material: Aluminum
Cage material: Steel
Cage length: Extended (99mm)
Max gear range: 11-42/46T
Weight: 345g

速别: 12 速
主体材料: 铝合金
导板材料: 铁
导板长度: LX (轴距: 99mm)
兼容齿数: 11-42/46T
重量: 345g



CS-A12

12SP CASSETTE

Size A: 11-13-15-18-21-23-26-30-34-40-46-52T
Size B: 11-13-15-17-19-21-24-28-32-36-42-50T
Size C: 11-13-15-17-19-21-24-28-33-36-40-46T

Cassettes material: Steel
Surface treatment: Nickel plating

飞轮材料: 钢
表面处理: 镀镍



SL-A1100-11W

Speed: 11S
Side: Right
Main material: Composite plastic
Lever material: Composite plastic
Window indicator: Yes
Weight: 126g

速別: 11 速
安裝位置: 右
主体材料: 复合塑料
拨杆材料: 复合塑料
视窗指示: 有
重量: 126g



RD-A1101

Speed: 11S
Main material: Aluminum
Cage material: Steel
Cage length: Long (83mm)
Max gear range: 11-46/50T
Weight: 335g

速別: 11 速
主体材料: 铝合金
导板材料: 铁
导板长度: L (轴距: 83mm)
兼容齿数: 11-46/50T
重量: 335g



CS-A11

11SP CASSETTE

Size A: 11-13-15-18-21-23-26-30-34-40-46T
Size B: 11-13-15-19-21-24-28-32-36-42-50T

Cassettes material: Steel
Surface treatment: Nickel plating

飞轮材料: 钢
表面处理: 镀镍



A9 2x11 SPEED



SL-A1100-11W

Speed: 2x11S
Main material: Composite plastic
Lever material: Composite plastic
Window indicator: Yes
Weight: 126g (L)/126g (R)

SL-A1100-2W

速别: 2x11 速
主体材料: 复合塑料
拨杆材料: 复合塑料
视窗指示: 有
重量: 126g(左)/126g(右)



RD-A1102-LX

Speed: 11S
Main material: Aluminum
Cage material: Steel
Cage length: Extended (99mm)
Max gear range: 11-42/46T
Weight: 345g

速别: 11 速
主体材料: 铝合金
导板材料: 铁
导板长度: LX (轴距: 99mm)
兼容齿数: 11-42/46T
重量: 345g



FD-A22L-2

Speed: 2S
Mounting: Low clamp
Spacer: 31.8-34.9mm
Operation mode: Dual pull
Chain stay angle: 66° -69°
Max gear range: 42T
Capacity: 14T
Chainline: 49.5-51.5mm
Weight: 149g

速别: 双盘
安装方式: C型 低夹环
变径套: 31.8-34.9mm
拉线方式: 双拉
安装角度: 66° -69°
兼容齿数: 42T
齿容量: 14T
链线: 49.5-51.5mm
重量: 149g



A7 1x10 SPEED



SL-A1000-10W

Speed: 10S
 Side: Right
 Main material: Composite plastic
 Lever material: Composite plastic
 Window indicator: Yes
 Weight: 126g

速别: 10 速
 安装位置: 右
 主体材料: 复合塑料
 拨杆材料: 复合塑料
 视窗指示: 有
 重量: 126g



RD-A1001-S

Speed: 10S
 Main material: Aluminum
 Cage material: Steel
 Cage length: Short (63mm)
 Max gear range: 11-42/46T
 Weight: 313g

速别: 10 速
 主体材料: 铝合金
 导板材料: 铁
 导板长度: S (轴距: 63mm)
 兼容齿数: 11-42/46T
 重量: 313g

RD-A1001-L

Speed: 10S
 Main material: Aluminum
 Cage material: Steel
 Cage length: Long (83mm)
 Max gear range: 11-42/46T
 Weight: 335g

速别: 10 速
 主体材料: 铝合金
 导板材料: 铁
 导板长度: L (轴距: 83mm)
 兼容齿数: 11-42/46T
 重量: 335g

A7 2x10 SPEED



SL-A1000-2W

Speed: 2x10S
 Main material: Composite plastic
 Lever material: Composite plastic
 Window indicator: Yes
 Weight: 126g (L)/126g (R)

SL-A1000-10W

速别: 2x10 速
 主体材料: 复合塑料
 拨杆材料: 复合塑料
 视窗指示: 有
 重量: 126g(左)/126g(右)



RD-A1002-LX

Speed: 10S
 Main material: Aluminum
 Cage material: Steel
 Cage length: Extended (99mm)
 Max gear range: 11-42/46T
 Weight: 345g

速别: 10 速
 主体材料: 铝合金
 导板材料: 铁
 导板长度: LX (轴距: 99mm)
 兼容齿数: 11-42/46T
 重量: 345g



FD-V5010L-2

Speed: 2S
 Mounting: Low clamp
 Spacer: 31.8-34.9mm
 Operation mode: Dual pull
 Chain stay angle: 66°-69°
 Max gear range: 42T
 Capacity: 14T
 Chainline: 49.5-51.5mm
 Weight: 149g

速别: 双盘
 安装方式: C型 低夹环
 变径套: 31.8-34.9mm
 拉线方式: 双拉
 安装角度: 66°-69°
 兼容齿数: 42T
 齿容量: 14T
 链线: 49.5-51.5mm
 重量: 149g



A7 3x10 SPEED



SL-A1000-3W

Speed: 3x10S
Main material: Composite plastic
Lever material: Composite plastic
Window indicator: Yes
Weight: 126g (L)/126g (R)

SL-A1000-10W

速别: 3x10 速
主体材料: 复合塑料
拨杆材料: 复合塑料
视窗指示: 有
重量: 126g(左)/126g(右)



FD-V5010L-A

Speed: 3S
Mounting: Low clamp
Spacer: 31.8-34.9mm
Operation mode: Dual pull
Chain stay angle: 66° -69°
Max gear range: 48T
Capacity: 22T
Chainline: 49.5-51.5mm
Weight: 149g

速别: 三盘
安装方式: C 型 低夹环
变径套: 31.8-34.9mm
拉线方式: 双拉
安装角度: 66° -69°
兼容齿数: 48T
齿容量: 22T
链线: 49.5-51.5mm
重量: 149g



RD-V5010-L

Speed: 10S
Main material: Composite plastic
Cage material: Steel
Cage length: Long (99mm)
Max gear range: 11-36T
Weight: 253g

速别: 10 速
主体材料: 复合塑料
导板材料: 铁
导板长度: L (轴距: 99mm)
兼容齿数: 11-36T
重量: 253g



CS-A7

10SP CASSETTE

Size A: 11-13-15-18-21-24-30-36-40-42T
Size B: 11-13-15-18-21-24-28-34-42-46T

Cassettes material: Steel
Surface treatment: Nickel plating

飞轮材料: 钢
表面处理: 镀镍



SL-A900-9W

Speed: 9S
Side: Right
Main material: Composite plastic
Lever material: Composite plastic
Window indicator: Yes
Weight: 126g

速別: 9速
安裝位置: 右
主體材料: 复合塑料
撥杆材料: 复合塑料
视窗指示: 有
重量: 126g



RD-A901-S

Speed: 9S
Main material: Aluminum
Cage material: Steel
Cage length: Short (63mm)
Max gear range: 11-42/46T
Weight: 313g

速別: 9速
主體材料: 鋁合金
導板材料: 鐵
導板長度: S (軸距: 63mm)
兼容齒數: 11-42/46T
重量: 313g

RD-A901-L

Speed: 9S
Main material: Aluminum
Cage material: Steel
Cage length: Long (83mm)
Max gear range: 11-42/46T
Weight: 335g

速別: 9速
主體材料: 鋁合金
導板材料: 鐵
導板長度: L (軸距: 83mm)
兼容齒數: 11-42/46T
重量: 335g



SL-A900-2W

Speed: 2x9S
Main material: Composite plastic
Lever material: Composite plastic
Window indicator: Yes
Weight: 126g (L)/126g (R)

SL-A900-9W

速別: 2x9速
主體材料: 复合塑料
撥杆材料: 复合塑料
视窗指示: 有
重量: 126g(左)/126g(右)



RD-A902-LX

Speed: 9S
Main material: Aluminum
Cage material: Steel
Cage length: Extended (99mm)
Max gear range: 11-42T
Weight: 345g

速別: 9速
主體材料: 鋁合金
導板材料: 鐵
導板長度: LX (軸距: 99mm)
兼容齒數: 11-42T
重量: 345g



FD-V5009L-2

Speed: 2S
Mounting: Low clamp
Spacer: 31.8-34.9mm
Operation mode: Dual pull
Chain stay angle: 66° -69°
Max gear range: 42T
Capacity: 14T
Chainline: 49.5-51.5mm
Weight: 149g

速別: 雙盤
安裝方式: C型 低夾環
變徑套: 31.8-34.9mm
拉線方式: 雙拉
安裝角度: 66° -69°
兼容齒數: 42T
齒容量: 14T
鏈線: 49.5-51.5mm
重量: 149g



SL-V4009-2W

Speed: 2x9S
Main material: Composite plastic
Lever material: Composite plastic
Window indicator: Yes
Weight: 139g (L)/139g (R)

SL-V4009-9W-2

速别: 2x9 速
主体材料: 复合塑料
拨杆材料: 复合塑料
视窗指示: 有
重量: 139g(左)/139g(右)



RD-V4009-M-2

Speed: 9S
Main material: Composite plastic
Cage material: Steel
Cage length: Medium (75mm)
Max gear range: 11-32T
Weight: 248g

速别: 9 速
主体材料: 复合塑料
导板材料: 铁
导板长度: M (轴距: 75mm)
兼容齿数: 11-32T
重量: 248g

RD-V4009-L-2

Speed: 9S
Main material: Composite plastic
Cage material: Steel
Cage length: Long (95mm)
Max gear range: 11-34T
Weight: 254g

速别: 9 速
主体材料: 复合塑料
导板材料: 铁
导板长度: L (轴距: 95mm)
兼容齿数: L: 11-34T
重量: 254g



FD-V5009L-2

Speed: 2S
Mounting: Low clamp
Spacer: 31.8-34.9mm
Operation mode: Dual pull
Chain stay angle: 66°-69°
Max gear range: 42T
Capacity: 14T
Chainline: 49.5-51.5mm
Weight: 149g

速别: 双盘
安装方式: C 型 低夹环
变径套: 31.8-34.9mm
拉线方式: 双拉
安装角度: 66°-69°
兼容齿数: 42T
齿容量: 14T
链线: 49.5-51.5mm
重量: 149g



A5 3x9 SPEED (1: 1)



SL-A900-3W

Speed: 3x9S
Main material: Composite plastic
Lever material: Composite plastic
Window indicator: Yes
Weight: 126g (L)/126g (R)

SL-A900-9W

速别: 3x9 速
主体材料: 复合塑料
拨杆材料: 复合塑料
视窗指示: 有
重量: 126g(左)/126g(右)



RD-V5009-L

Speed: 9S
Main material: Composite plastic
Cage material: Steel
Cage length: Long (99mm)
Max gear range: 11-36T
Weight: 275g

速别: 9 速
主体材料: 复合塑料
导板材料: 铁
导板长度: L (轴距: 99mm)
兼容齿数: 11-36T
重量: 275g



FD-V5009L

Speed: 3S
Mounting: Low clamp
Spacer: 31.8-34.9mm
Operation mode: Dual pull
Chain stay angle: 66° -69°
Max gear range: 48T
Capacity: 22T
Chainline: 49.5-51.5mm
Weight: 149g

速别: 三盘
安装方式: C 型 低夹环
变径套: 31.8-34.9mm
拉线方式: 双拉
安装角度: 66° -69°
兼容齿数: 48T
齿容量: 22T
链线: 49.5-51.5mm
重量: 149g



SL-V4009-3W

Speed: 3x9S
Main material: Composite plastic
Lever material: Composite plastic
Window indicator: Yes
Weight: 139g (L)/139g (R)

SL-V4009-9W-2

速别: 3x9 速
主体材料: 复合塑料
拨杆材料: 复合塑料
视窗指示: 有
重量: 139g(左)/139g(右)



ST-TX4009-L

Speed: 3x9S
Main material: Aluminum
Window indicator: Yes
Weight: 185g (L)/185g (R)

ST-TX4009-9R

速别: 3x9 速
主体材料: 铝合金
视窗指示: 有
重量: 185g(左)/185g(右)



RD-V4009-M-2

Speed: 9S
Main material: Composite plastic
Cage material: Steel
Cage length: Medium (75mm)
Max gear range: 11-32T
Weight: 248g

速别: 9 速
主体材料: 复合塑料
导板材料: 铁
导板长度: M (轴距: 75mm)
兼容齿数: 11-32T
重量: 248g

RD-V4009-L-2

Speed: 9S
Main material: Composite plastic
Cage material: Steel
Cage length: Medium (75mm)
Max gear range: 11-34T
Weight: 254g

速别: 9 速
主体材料: 复合塑料
导板材料: 铁
导板长度: M (轴距: 75mm)
兼容齿数: L: 11-34T
重量: 254g(L)



FD-V5009L

Speed: 3S
Mounting: Low clamp
Spacer: 31.8-34.9mm
Operation mode: Dual pull
Chain stay angle: 66° -69°
Max gear range: 48T
Capacity: 22T
Chainline: 49.5-51.5mm
Weight: 149g

速别: 三盘
安装方式: C 型 低夹环
变径套: 31.8-34.9mm
拉线方式: 双拉
安装角度: 66° -69°
兼容齿数: 48T
齿容量: 22T
链线: 49.5-51.5mm
重量: 149g



FD-V4009-L

Speed: 3S
Mounting: Clamp
Spacer: 28.6mm/31.8mm/34.9mm
Operation mode: Down pull
Chain stay angle: 66° -69°
Max gear range: 42T/34T/24T
Capacity: 18T
Chainline: 47.5mm
Weight: 135g

速别: 三盘
安装方式: 夹环式
变径套: 28.6mm/31.8mm/34.9mm
拉线方式: 下拉
安装角度: 66° -69°
兼容齿数: 42T/34T/24T
齿容量: 18T
链线: 47.5mm
重量: 135g



CS-A5

9SP CASSETTE

Size A: 11-13-15-18-21-24-28-32-36T
Size B: 11-13-15-18-21-23-26-30-34T
Size C: 11-13-15-17-19-21-24-28-32T

Cassettes material: Steel
Surface treatment: Nickel plating

飞轮材料: 钢
表面处理: 镀镍



SL-A800-8W

Speed: 8S
Side: Right
Main material: Composite plastic
Lever material: Composite plastic
Window indicator: Yes
Weight: 126g

速别: 8 速
安装位置: 右
主体材料: 复合塑料
拨杆材料: 复合塑料
视窗指示: 有
重量: 126g(右)



RD-A801-S

Speed: 8S
Main material: Aluminum
Cage material: Steel
Cage length: Short (63mm)
Max gear range: 11-42T
Weight: 313g

速别: 8 速
主体材料: 铝合金
导板材料: 铁
导板长度: S (轴距: 63mm)
兼容齿数: 11-42T
重量: 313g

RD-A801-L

Speed: 8S
Main material: Aluminum
Cage material: Steel
Cage length: Long (83mm)
Max gear range: 11-42T
Weight: 335g

速别: 8 速
主体材料: 铝合金
导板材料: 铁
导板长度: L (轴距: 83mm)
兼容齿数: 11-42T
重量: 335g



SL-A800-2W

Speed: 2x8S
Main material: Composite plastic
Lever material: Composite plastic
Window indicator: Yes
Weight: 126g (L)/126g (R)

SL-A800-8W

速别: 2x8 速
主体材料: 复合塑料
拨杆材料: 复合塑料
视窗指示: 有
重量: 126g(左)/126g(右)



RD-A802-LX

Speed: 8S
Main material: Aluminum
Cage material: Steel
Cage length: Extended (99mm)
Max gear range: 11-42T
Damping system: No
Weight: 345g

速别: 8 速
主体材料: 铝合金
导板材料: 铁
导板长度: LX (轴距: 99mm)
兼容齿数: 11-42T
阻尼系统: 无
重量: 345g



FD-V5008L-2

Speed: 2S
Mounting: Low clamp
Spacer: 31.8-34.9mm
Operation mode: Dual pull
Chain stay angle: 66° -69°
Max gear range: 42T
Capacity: 14T
Chainline: 49.5-51.5mm
Weight: 149g

速别: 双盘
安装方式: C 型 低夹环
变径套: 31.8-34.9mm
拉线方式: 双拉
安装角度: 66° -69°
兼容齿数: 42T
齿容量: 14T
链线: 49.5-51.5mm
重量: 149g



SL-A800-2W

Speed: 2x8S
Main material: Composite plastic
Lever material: Composite plastic
Window indicator: Yes
Weight: 126g (L)/126g (R)

SL-A800-8W-2

速别: 2x8 速
主体材料: 复合塑料
拨杆材料: 复合塑料
视窗指示: 有
重量: 126g(左)/126g(右)



SL-V4008-2W

Speed: 2x8S
Main material: Composite plastic
Lever material: Composite plastic
Window indicator: Yes
Weight: 139g (L)/139g (R)

SL-V4008-8W-2

速别: 2x8 速
主体材料: 复合塑料
拨杆材料: 复合塑料
视窗指示: 有
重量: 139g(左)/139g(右)



RD-V4008-M-2

Speed: 8S
Main material: Composite plastic
Cage material: Steel
Cage length: Medium (75mm)
Max gear range: 11-32T
Weight: 248g

速别: 8 速
主体材料: 复合塑料
导板材料: 铁
导板长度: M (轴距: 75mm)
兼容齿数: 11-32T
重量: 248g

RD-V4008-L-2

Speed: 8S
Main material: Composite plastic
Cage material: Steel
Cage length: Long (95mm)
Max gear range: 11-34T
Weight: 254g (L)

速别: 8 速
主体材料: 复合塑料
导板材料: 铁
导板长度: L (轴距: 95mm)
兼容齿数: 11-34T
重量: 254g(L)



FD-V5008L-2

Speed: 2S
Mounting: Low clamp
Spacer: 31.8-34.9mm
Operation mode: Dual pull
Chain stay angle: 66° -69°
Max gear range: 42T
Capacity: 14T
Chainline: 49.5-51.5mm
Weight: 149g

速别: 双盘
安装方式: C 型 低夹环
变径套: 31.8-34.9mm
拉线方式: 双拉
安装角度: 66° -69°
兼容齿数: 42T
齿容量: 14T
链线: 49.5-51.5mm
重量: 149g



A3 3x8 SPEED (1: 1)



SL-A800-3W

Speed: 3x8S
Main material: Composite plastic
Lever material: Composite plastic
Window indicator: Yes
Weight: 126g (L)/126g (R)

SL-A800-8W

速别: 3x8 速
主体材料: 复合塑料
拨杆材料: 复合塑料
视窗指示: 有
重量: 126g(左)/126g(右)



RD-V5008-L

Speed: 8S
Main material: Composite plastic
Cage material: Steel
Cage length: Long (99mm)
Max gear range: 11-36T
Weight: 275g

速别: 8 速
主体材料: 复合塑料
导板材料: 铁
导板长度: L (轴距: 99mm)
兼容齿数: 11-36T
重量: 275g



FD-V5008L-A

Speed: 3S
Mounting: Low clamp
Spacer: 31.8-34.9mm
Operation mode: Dual pull
Chain stay angle: 66° -69°
Max gear range: 48T
Capacity: 22T
Chainline: 49.5-51.5mm
Weight: 149g

速别: 三盘
安装方式: C 型 低夹环
变径套: 31.8-34.9mm
拉线方式: 双拉
安装角度: 66° -69°
兼容齿数: 48T
齿容量: 22T
链线: 49.5-51.5mm
重量: 149g



A3 3x8 SPEED (2: 1)



SL-A800-3W

Speed: 3x8S
Main material: Composite plastic
Lever material: Composite plastic
Window indicator: Yes
Weight: 126g (L)/126g (R)

SL-A800-8W-2

速别: 3x8 速
主体材料: 复合塑料
拨杆材料: 复合塑料
视窗指示: 有
重量: 126g(左)/126g(右)



SL-V4008-3W

Speed: 3x8S
Main material: Composite plastic
Lever material: Composite plastic
Window indicator: Yes
Weight: 139g (L)/139g (R)

SL-V4008-8W-2

速别: 3x8 速
主体材料: 复合塑料
拨杆材料: 复合塑料
视窗指示: 有
重量: 139g(左)/139g(右)



ST-TX4008-L

Speed: 3x8S
Main material: Aluminum
Window indicator: Yes
Weight: 185g (L)/185g (R)

ST-TX4008-8R

速别: 3x8 速
主体材料: 铝合金
视窗指示: 有
重量: 185g(左)/185g(右)



RD-V4008-M-2

Speed: 8S
Main material: Composite plastic
Cage material: Steel
Cage length: Medium (75mm)
Max gear range: 11-32T
Weight: 248g

速别: 8 速
主体材料: 复合塑料
导板材料: 铁
导板长度: M (轴距: 75mm)
兼容齿数: 11-32T
重量: 248g

RD-V4008-L-2

Speed: 8S
Main material: Composite plastic
Cage material: Steel
Cage length: Long (95mm)
Max gear range: 11-34T
Weight: 254g

速别: 8 速
主体材料: 复合塑料
导板材料: 铁
导板长度: L (轴距: 95mm)
兼容齿数: 11-34T
重量: 254g



FD-V4008-L

Speed: 3S
Mounting: Clamp
Spacer: 28.6mm/31.8mm/34.9mm
Operation mode: Down pull
Chain stay angle: 66° -69°
Max gear range: 42T/34T/24T
Capacity: 18T
Chainline: 47.5mm
Weight: 135g

速别: 三盘
安装方式: 夹环式
变径套: 28.6mm/31.8mm/34.9mm
拉线方式: 下拉
安装角度: 66° -69°
兼容齿数: 42T/34T/24T
齿容量: 18T
链线: 47.5mm
重量: 135g



FD-V5008L-A

Speed: 3S
Mounting: Low clamp
Spacer: 31.8-34.9mm
Operation mode: Dual pull
Chain stay angle: 66° -69°
Max gear range: 48T
Capacity: 22T
Chainline: 49.5-51.5mm
Weight: 149g

速别: 三盘
安装方式: C型 低夹环
变径套: 31.8-34.9mm
拉线方式: 双拉
安装角度: 66° -69°
兼容齿数: 48T
齿容量: 22T
链线: 49.5-51.5mm
重量: 149g



A2 1x7 SPEED



SL-A700-7W

Speed: 7S
Side: Right
Main material: Composite plastic
Lever material: Composite plastic
Window indicator: Yes
Weight: 126g

速别: 7 速
安装位置: 右
主体材料: 复合塑料
拨杆材料: 复合塑料
视窗指示: 有
重量: 126g



RD-A701-L

Speed: 7S
Main material: Aluminum
Cage material: Steel
Cage length: Long (83mm)
Max gear range: 11-42T
Weight: 335g

速别: 7 速
主体材料: 铝合金
导板材料: 铁
导板长度: L (轴距: 83mm)
兼容齿数: 11-42T
重量: 335g



SL-A700-3W

Speed: 3x7S
Main material: Composite plastic
Lever material: Composite plastic
Window indicator: Yes
Weight: 126g (L)/126g (R)

SL-A700-7W-2

速别: 3x7 速
主体材料: 复合塑料
拨杆材料: 复合塑料
视窗指示: 有
重量: 126g(左)/126g(右)



SL-V4007-3W

Speed: 3x7S
Main material: Composite plastic
Lever material: Composite plastic
Window indicator: Yes
Weight: 134g (L)/134g (R)

SL-V4007-7W-2

速别: 3x7 速
主体材料: 复合塑料
拨杆材料: 复合塑料
视窗指示: 有
重量: 134g(左)/134g(右)



ST-TX4007-L

Speed: 3x7S
Main material: Aluminum
Window indicator: Yes
Weight: 185g (L)/185g (R)

ST-TX4007-7R

速别: 3x7 速
主体材料: 铝
视窗指示: 有
重量: 185g(左)/185g(右)



RD-V4007-M-2

Speed: 7S
Main material: Composite plastic
Cage material: Steel
Cage length: Medium (75mm)
Max gear range: 11-32T
Weight: 248g

速别: 7 速
主体材料: 复合塑料
导板材料: 铁
导板长度: M (轴距: 75mm)
兼容齿数: 11-32T
重量: 248g

RD-V4007-L-2

Speed: 7S
Main material: Composite plastic
Cage material: Steel
Cage length: Long (95mm)
Max gear range: -34T
Damping system: No
Weight: 256g

速别: 7 速
主体材料: 复合塑料
导板材料: 铁
导板长度: L (轴距: 95mm)
兼容齿数: 11-34T
阻尼系统: 无
重量: 256g



FD-V5007L-A

Speed: 3S
Mounting: Low clamp
Spacer: 31.8-34.9mm
Operation mode: Dual pull
Chain stay angle: 66° -69°
Max gear range: 48T
Capacity: 22T
Chainline: 49.5-51.5mm
Weight: 149g

速别: 三盘
安装方式: C型 低夹环
变径套: 31.8-34.9mm
拉线方式: 双拉
安装角度: 66° -69°
兼容齿数: 48T
齿容量: 22T
链线: 49.5-51.5mm
重量: 149g



FD-V4007-L

Speed: 3S
Mounting: Clamp
Spacer: 28.6mm/31.8mm/34.9mm
Operation mode: Down pull
Chain stay angle: 66° -69°
Max gear range: 42T/34T/24T
Capacity: 18T
Chainline: 47.5mm
Weight: 135g

速别: 三盘
安装方式: 夹环式
变径套: 28.6mm/31.8mm/34.9mm
拉线方式: 下拉
安装角度: 66° -69°
兼容齿数: 42T/34T/24T
齿容量: 18T
链线: 47.5mm
重量: 135g



A2 3x06 SPEED



SL-V4006-3W

Speed: 3x6S
Main material: Composite plastic
Lever material: Composite plastic
Window indicator: Yes
Weight: 134g (L)/134g (R)

SL-V4006-6W-2

速別: 3x6 速
主体材料: 复合塑料
拨杆材料: 复合塑料
视窗指示: 有
重量: 134g(左)/134g(右)



FD-V5006L

Speed: 3S
Mounting: Low clamp
Spacer: 31.8-34.9mm
Operation mode: Dual pull
Chain stay angle: 66° -69°
Max gear range: 48T
Capacity: 22T
Chainline: 49.5-51.5mm
Weight: 149g

速別: 三盘
安装方式: C型 低夹环
变径套: 31.8-34.9mm
拉线方式: 双拉
安装角度: 66° -69°
兼容齿数: 48T
齿容量: 22T
链线: 49.5-51.5mm
重量: 149g



RD-V4006-M-2

Speed: 6S
Main material: Composite plastic
Cage material: Steel
Cage length: Medium (75mm)
Max gear range: 11-32T
Weight: 247g

速別: 6 速
主体材料: 复合塑料
导板材料: 铁
导板长度: M (轴距: 75mm)
兼容齿数: 11-32T
重量: 247g

R series

公路 Road Bike

R 系列是专为追求速度与性能的公路自行车手设计的顶级变速套件系列，旨在为骑行者提供极致的操控体验和竞速优势。该系列涵盖了多种先进技术配置，满足不同骑行风格和竞赛需求，是公路骑行爱好者和专业车手的理想选择。

Electric Road(电子公路变速套件)

Electric Road 结合了油压碟刹系统与电子变速技术，实现了精准、快速的变速响应和卓越的制动性能。电子变速的智能操控让骑行更加高效，特别适合追求极致速度与操控感的竞速车手。

Disc Road(机械变速油压碟刹套件)

Disc Road 采用油压碟刹系统与机械变速技术的组合，提供了强大的制动力和可靠的变速性能。其油压碟刹系统在湿滑或复杂路况下表现尤为出色，是长途骑行和耐力赛的优选。

Mechanical Road(传统线拉制动套件)

Mechanical Road 延续了经典的线拉制动系统，搭配机械变速技术，以轻量化设计和简洁结构著称。它不仅保留了传统公路骑行的纯粹操控感，还提供了出色的性价比，适合入门车手和经典公路车爱好者。

The R series is a top-tier drivetrain system designed for road cyclists seeking speed and performance, offering exceptional control and competitive edge. With advanced configurations, it caters to various riding styles and racing needs, making it ideal for both enthusiasts and professionals.

Electric Road (Electronic Drivetrain)

Combining hydraulic disc brakes with electronic shifting, Electric Road delivers precise, rapid shifts and superior braking. Its smart shifting enhances efficiency, perfect for racers prioritizing speed and control.

Disc Road (Mechanical Drivetrain with Hydraulic Disc Brakes)

Disc Road pairs hydraulic disc brakes with mechanical shifting, providing strong braking and reliable performance. Its hydraulic system excels in wet or challenging conditions, ideal for endurance rides and long-distance races.

Mechanical Road (Traditional Cable-Actuated Brakes)

Mechanical Road features classic cable-actuated brakes and mechanical shifting, known for its lightweight design and simplicity. It offers a pure riding experience and great value, suitable for beginners and traditional road bike enthusiasts.

电子变速 Electronic Shifting

eRX
2x10-12 SPEED

eR9
2x10-12 SPEED

机械变速 Mechanical Shifting

RX
2x12 SPEED

R9
2x11 SPEED

R7
2x10 SPEED

R5
2x9 SPEED

R3
2x8 SPEED

R2
2x7 SPEED





ST-R9301-L

Speed: 2x10-12S
Brakes lever: Carbon
Braking mode: Hydraulic
Weight: 237g(L)/237g(R)

ST-R9301-R

速别: 2x10-12 速
刹车杆材料: 碳纤维
制动方式: 液压
重量: 237g(左)/237g(右)



RD-R9301

Speed: 10-12S
Main material: Carbon & Aluminum
Cage material: Carbon (Outside)
Cage length: Medium (93mm)
Max gear range: 11-32T
Weight: 286g

速别: 10-12 速
主体材料: 碳纤维 & 铝合金
导板材料: 碳纤维 (外导板)
导板长度: M(轴距: 93mm)
兼容齿数: 11-32T
重量: 286g



FD-R9301

Speed: 2S
Mounting: Direct
Operation mode: Electric
Max gear range: 54T
Capacity: 16T
Chainline: 43.5-44.5mm
Weight: 138g

速别: 2 速
安装方式: 直装
拉线方式: 电动
兼容齿数: 54T
齿容量: 16T
链线: 43.5-44.5mm
重量: 138g



BR-R7120-F

One-piece caliper

Brake type: Disc brake
Main material: Aluminum
Pads: Egg roll cooling brake pads
Weight: 110g

BR-R7120-R

一体式夹器

刹车方式: 碟刹
材质: 铝合金
来令片: 蛋卷散热来令片
重量: 110g



BL-R9001

Speed: No
Main material: Aluminum
Braking mode: Hydraulic
Weight: 148g(L)/148g(R)

速别: 无
主体材料: 铝合金
制动方式: 液压
重量: 148g(左)/148g(右)



SW-R9001-L

Speed: 10-12S
Control method: Wireless
Main material: Composite plastic
Weight: 40g

SW-R9001-R

速别: 10-12 速
控制方式: 无线
主体材料: 复合塑料
重量: 40g



SL-E9001

Short-reach design

Speed: 10-12S
Control method: Wireless
Main material: Aluminum
Button angle: 18° adjustment
Weight: 80g

短握距

速别: 10-12 速
控制方式: 无线
主体材料: 铝合金
按键角度: 支持 18°范围调节
重量: 80g



BT-R9001

Li-ion Battery

Nominal voltage: 7.4V
Charging voltage: 8.4V
Max charging current: 1.5A
Rated capacity: 800mAh 5.92Wh

二次锂电池组

标称电压: 7.4V
充电电压: 8.4V
最大充电电流: 1.5A
额定容量: 800mAh 5.92Wh





ST-R8301-L

Speed: 2x10-12S
Brakes lever: Aluminum
Braking mode: Hydraulic
Weight: 257g(L)/257g(R)

ST-R8301-R

速别: 2x10-12 速
刹车杆材料: 铝合金
制动方式: 液压
重量: 255g(左)/255g(右)



RD-R8301

Speed: 10-12S
Main material: Aluminum
Cage material: Aluminum
Cage length: Medium (93mm)
Max gear range: 11-32T
Weight: 292g

速别: 10-12 速
主体材料: 铝合金
导板材料: 铝合金
导板长度: M (轴距: 93mm)
兼容齿数: 11-32T
重量: 292g



FD-R8301

Speed: 2S
Mounting: Direct
Operation mode: Electric
Max gear range: 54T
Capacity: 16T
Chainline: 43.5-44.5mm
Weight: 138g

速别: 2 速
安装方式: 直装
拉线方式: 电动
兼容齿数: 54T
齿容量: 16T
链线: 43.5-44.5mm
重量: 138g



BR-R6120-F

One-piece caliper
Brake type: Disc brake
Main material: Aluminum
Pads: Egg roll cooling brake pads
Weight: 110g

BR-R6120-R

一体式夹器
刹车方式: 碟刹
材质: 铝合金
来令片: 蛋卷散热来令片
重量: 110g



BL-R8001

Speed: No
Main material: Aluminum
Braking mode: Hydraulic
Weight: 148g(L)/148g(R)

速别: 无
主体材料: 铝合金
制动方式: 液压
重量: 148g(左)/148g(右)



SW-R8001-L

Speed: 10-12S
Control method: Wireless
Main material: Composite plastic
Compatibility: L-TWOO only
Color: Series color
Weight: 40g

SW-R8001-R

速别: 10-12 速
控制方式: 无线
主体材料: 复合塑料
兼容性: 蓝图自有
颜色: 系列颜色
重量: 40g



BT-R9001

Li-ion Battery

Nominal voltage: 7.4V
Charging voltage: 8.4V
Max charging current: 1.5A
Rated capacity: 800mAh 5.92Wh

二次锂电池组

标称电压: 7.4V
充电电压: 8.4V
最大充电电流: 1.5A
额定容量: 800mAh 5.92Wh



ST-R7020-L

Carbon
Speed: 2x12S
Brake levers: Carbon
Braking mode: Hydraulic
Weight: 250g (L)/250g (R)

ST-R7020-R

碳纤维
速别: 2x12 速
刹车杆材料: 碳纤维
制动方式: 液压
重量: 250g(左)/250g(右)



ST-R7010-L

Aluminum
Speed: 2x12S
Brakes lever: Aluminum
Braking mode: Hydraulic
Weight: 275g (L)/275g (R)

ST-R7010-R

铝合金
速别: 2x12 速
刹车杆材料: 铝合金
制动方式: 液压
重量: 275g(左)/275g(右)



ST-RS7010-L

Short-reach lever

Speed: 2x12S
Brakes lever: Aluminum
Braking mode: Hydraulic
Weight: 275g (L)/275g (R)

ST-RS7010-R

短握距

速别: 2x12 速
刹车杆材料: 铝合金
制动方式: 液压
重量: 275g(左)/275g(右)




BR-R7020-F

Brake type: Disc brake
Main material: Aluminum
Pads: Egg roll cooling brake pads
Weight: 128g

BR-R7020-R

刹车方式: 碟刹
材质: 铝合金
来令片: 蛋卷散热来令片
重量: 128g



DS-R214-A

140mm

Six nail brake disc
Thickness: 1.8mm
Weight:
123g (160mm)
105g (140mm)

DS-R216-A

160mm

6 螺钉式碟刹盘片
厚度: 1.8mm
重量:
123g(160mm)
105g(140mm)



ST-R5112-12

Speed: 2x12S
Brakes lever: Aluminum
Braking mode: Cable actuation
Weight: 237g (L)/237g (R)

ST-R5112-2

速别: 2x12 速
刹车杆材料: 铝合金
制动方式: 线拉制动
重量: 237g(左)/237g(右)



RD-R5012-M-C

Carbon
Speed: 12S
Main material: Aluminum
Cage material: Carbon
Cage length: Medium (73mm)
Max gear range: 11-32T
Weight: 225g

碳纤维
速别: 12 速
主要材料: 铝合金
外导板: 碳纤维
导板长度: M(轴距: 73mm)
兼容齿数: 11-32T
重量: 225g



FD-R5012-D-W

With tuning screws
With shift cable housing anchor point
Weight: 104g

配备微调螺丝
配备变速线管支点
重量: 104g

FD-R5012-D-T

With tuning screws
No housing anchor point
Weight: 107g

配备微调螺丝
无变速线管支点
重量: 107g

FD-R5012-D

Weight: 98g
Speed: 2S
Mounting: D-Type
Max gear range: 56T
Capacity: 16T
Chainline: 43.5mm

重量: 98g
速别: 双盘
安装: D型, 直装
最大兼容齿数: 56T
齿容量: 16T
链线: 43.5mm



FD-R5012-C

Speed: 2S
Mounting: C-Type
Spacer: 31.8-34.9mm
Max gear range: 56T
Capacity: 16T
Chainline: 43.5mm
Weight: 124g

速别: 双盘
安装方式: C-Type 低夹环
变径套: 31.8-34.9mm
最大兼容齿数: 56T
齿容量: 16T
链线: 43.5mm
重量: 124g



CS-RX

12SP CASSETTE

Size A: 11-12-13-14-15-17-19-21-23-26-30-32T
Size B: 11-12-13-14-15-16-17-19-21-23-26-30T

Cassettes material: Steel
Surface treatment: Nickel plating

飞轮材料: 钢
表面处理: 镀镍

R9

R9 DISC 2x11 SPEED



ST-R6020-L

Carbon
Speed: 2x11S
Brake levers: Carbon
Braking mode: Hydraulic
Weight: 250g(L)/250g(R)

ST-R6020-R

碳纤维
速别: 2x11 速
刹车杆材料: 碳纤维
制动方式: 液压
重量: 250g(左)/250g(右)



ST-R6010-L

Aluminum
Speed: 2x11S
Brake levers: Aluminum
Braking mode: Hydraulic
Weight: 275g(L)/275g(R)

ST-R6010-R

铝合金
速别: 2x11 速
刹车杆材料: 铝合金
制动方式: 液压
重量: 275g(左)/275g(右)



ST-RS6010-L

Short-reach lever
Speed: 2x11S
Brakes lever: Aluminum
Braking mode: Hydraulic
Weight: 275g(L)/275g(R)

ST-RS6010-R

短握距
速别: 2x11 速
刹车杆材料: 铝合金
制动方式: 液压
重量: 275g(左)/275g(右)




BR-R6020-F

Brake type: Disc brake
Main material: Aluminum
Pads: Egg roll cooling brake pads
Weight: 128g

BR-R6020-R

刹车方式: 碟刹
材质: 铝合金
来令片: 蛋卷散热来令片
重量: 128g



DS-R214-A

140mm
Six nail brake disc
Thickness: 1.8mm
Weight:
123g (160mm)
105g (140mm)

DS-R216-A

160mm
6 螺钉式碟刹盘片
厚度: 1.8mm
重量:
123g(160mm)
105g(140mm)



CS-R9

11SP CASSETTE
Size A: 11-12-13-14-16-18-21-23-25-28-32T
Size B: 11-12-13-14-15-17-19-21-23-26-30T

Cassettes material: Steel
Surface treatment: Nickel plating

飞轮材料: 钢
表面处理: 镀镍



ST-R5111-2

Speed: 2x11S
Brakes lever: Aluminum
Braking mode: Cable actuation
Weight: 237g(L)/237g(R)

ST-R5111-11

速别: 2x11 速
刹车杆材料: 铝合金
制动方式: 线拉制动
重量: 237g(左)/237g(右)



ST-R4011-1

Short-reach design

Speed: 1x11S
Brakes lever: Aluminum
Braking mode: Cable actuation
Weight: 184g(L)/241g(R)

ST-R4011-11

短握距

速别: 1x11 速
刹车杆材料: 铝合金
制动方式: 线拉制动
重量: 184g(左)/241g(右)



RD-R5011-M-C

Carbon

Speed: 11S
Main material: Aluminum
Cage material: Carbon
Cage length: Medium (73mm)
Max gear range: 11-32T
Weight: 225g

碳纤维

速别: 11 速
主要材料: 铝合金
外导板: 碳纤维
导板长度: M(轴距: 73mm)
兼容齿数: 11-32T
重量: 225g



FD-R5011-D-W

With tuning screws
With shift cable housing anchor point
Weight: 104g

配备微调螺丝
配备变速线管支点
重量: 104g



FD-R5011-D-T

With tuning screws
No housing anchor point
Weight: 107g

配备微调螺丝
无变速线管支点
重量: 107g



FD-R5011-D

Weight: 98g

重量: 98g

Speed: 2S
Mounting: D-Type
Max gear range: 56T
Capacity: 16T
Chainline: 43.5mm

速别: 双盘
安装: D 型, 直装
最大兼容齿数: 56T
齿容量: 16T
链线: 43.5mm



FD-R5011-C

Speed: 2S
Mounting: C-Type
Spacer: 31.8-34.9mm
Max gear range: 56T
Capacity: 16T
Chainline: 43.5mm
Weight: 130g

速别: 双盘
安装方式: C-Type 低夹环
变径套: 31.8-34.9mm
最大兼容齿数: 56T
齿容量: 16T
链线: 43.5mm
重量: 130g

R7

R7 DISC 2x10 SPEED

DISC



ST-R5010-L

Speed: 2x10S
Brakes lever: Aluminum
Braking mode: Hydraulic
Weight: 275g(L)/275g(R)

ST-R5010-R

速别: 2x10 速
刹车杆材料: 铝合金
制动方式: 液压
重量: 275g(左)/275g(右)

DISC



ST-RS5010-L

Short-reach lever

Speed: 2x10S
Brakes lever: Aluminum
Braking mode: Hydraulic
Weight: 275g(L)/275g(R)

ST-RS5010-R

短握距

速别: 2x10 速
刹车杆材料: 铝合金
制动方式: 液压
重量: 275g(左)/275g(右)



RD-R6010-M

Dual-spring Design

Speed: 10S
Main material: Aluminum
Cage material: Aluminum
Cage length: Medium (93mm)
Max gear range: 11-32T
Weight: 255g

双弹簧结构

速别: 10 速
主要材料: 铝合金
导板: 铝合金
导板长度: M(轴距: 93mm)
兼容齿数: 11-32T
重量: 255g



BR-R5010-F

Brake type: Disc brake
Main material: Aluminum
Pads: Egg roll cooling brake pads
Weight: 128g

BR-R5010-R

刹车方式: 碟刹
材质: 铝合金
来令片: 蛋卷散热来令片
重量: 128g



FD-R5010-D-W

With tuning screws
With shift cable housing anchor point
Weight: 104g

配备微调螺丝
配备变速线管支点
重量: 104g

FD-R5010-D-T

With tuning screws
No housing anchor point
Weight: 107g

配备微调螺丝
无变速线管支点
重量: 107g

FD-R5010-D

Weight: 98g

重量: 98g

Speed: 2S
Mounting: D-Type
Max gear range: 56T
Capacity: 16T
Chainline: 43.5mm

速别: 双盘
安装: D 型, 直装
最大兼容齿数: 56T
齿容量: 16T
链线: 43.5mm



R7 2x10 SPEED



ST-R5110-2

Speed: 2x10S
Brakes lever: Aluminum
Braking mode: Cable actuation
Weight: 237g (L)/237g (R)

ST-R5110-10

速别: 2x10 速
刹车杆材料: 铝合金
制动方式: 线拉制动
重量: 237g(左)/237g(右)



ST-R4010-2

ST-R4010-1

Short-reach design

Speed: 2x10S, 1x10S
Brakes lever: Aluminum
Braking mode: Cable actuation
Weight: 184g (L)/241g (R)

ST-R4010-10

短握距

速别: 2x10 速, 1x10 速
刹车杆材料: 铝合金
制动方式: 线拉制动
重量: 184g(左)/241g(右)



SL-R5010-2W

Speed: 2x10S
Main material: Composite plastic
Lever material: Composite plastic
Window indicator: Yes
Weight: 126g (L)/126g (R)

SL-R5010-10W

速别: 2x10 速
主体材料: 复合塑料
拨杆材料: 复合塑料
视窗指示: 有
重量: 126g(左)/126g(右)



RD-R5010-S

Speed: 11S
Main material: Aluminum
Cage length: Short (55mm)
Max gear range: 11-28T
Weight: 246g

速别: 10 速
主体材料: 铝
导板长度: S(轴距: 55mm)
兼容齿数: 11-28T
重量: 246g



FD-R5010-C

Speed: 2S
Mounting: C-Type
Spacer: 31.8-34.9mm
Max gear range: 56T
Capacity: 16T
Chainline: 43.5mm
Weight: 124g

速别: 双盘
安装方式: C-Type 低夹环
变径套: 31.8-34.9mm
最大兼容齿数: 56T
齿容量: 16T
链线: 43.5mm
重量: 124g



CS-R7

11SP CASSETTE

Size A: 11-12-13-17-19-21-23-25-28-32T
Size B: 11-12-13-14-15-17-19-21-24-28T
Size C: 11-12-13-14-15-17-19-21-23-25T

Cassettes material: Steel
Surface treatment: Nickel plating

飞轮材料: 钢
表面处理: 镀镍

DISC



ST-R4009-L

Speed: 2x9S
Brakes lever: Aluminum
Braking mode: Hydraulic
Weight: 275g (L)/275g (R)

ST-R4009-R

速别: 2x9 速
刹车杆材料: 铝合金
制动方式: 液压
重量: 275g(左)/275g(右)

DISC



ST-RS4009-L

Short-reach lever

Speed: 2x9S
Brakes lever: Aluminum
Braking mode: Hydraulic
Weight: 275g (L)/275g (R)

ST-RS4009-R

短握距

速别: 2x9 速
刹车杆材料: 铝合金
制动方式: 液压
重量: 275g(左)/275g(右)



RD-R5009-M

Speed: 9S
Main material: Aluminum
Cage length: Medium (73mm)
Max gear range: 11-32T
Weight: 247g

速别: 9 速
主体材料: 铝合金
导板长度: M (轴距: 73mm)
兼容齿数: 11-32T
重量: 247g



BR-R4010-F

Brake type: Disc brake
Main material: Aluminum
Pads: Standard brake pads
Weight: 128g

BR-R4010-R

刹车方式: 碟刹
材质: 铝合金
来令片: 普通来令片
重量: 128g



FD-R5009-D-W

With tuning screws
With shift cable housing anchor point
Weight: 104g

配备微调螺丝
配备变速线管支点
重量: 104g

FD-R5009-D-T

With tuning screws
No housing anchor point
Weight: 107g

配备微调螺丝
无变速线管支点
重量: 107g

FD-R5009-D

Weight: 98g

重量: 98g

Speed: 2S
Mounting: D-Type
Max gear range: 56T
Capacity: 16T
Chainline: 43.5mm

速别: 双盘
安装: D型, 直装
最大兼容齿数: 56T
齿容量: 16T
链线: 43.5mm



ST-R5109-2

Speed: 2x9S
Brakes lever: Aluminum
Braking mode: Cable actuation
Weight: 237g (L)/237g (R)

ST-R5109-9

速别: 2x9 速
刹车杆材料: 铝合金
制动方式: 线拉制动
重量: 237g(左)/237g(右)



ST-R4009-2

ST-R4009-1

Short-reach design

Speed: 2x10S, 1x10S
Brakes lever: Aluminum
Braking mode: Cable actuation
Weight: 184g (L)/241g (R)

ST-R4009-9

短握距

速别: 2x10 速, 1x10 速
刹车杆材料: 铝合金
制动方式: 线拉制动
重量: 184g(左)/241g(右)



SL-R5009-2W

Flat Bar Road Bike

Speed: 2x9S
Main material: Composite plastic
Lever material: Composite plastic
Window indicator: Yes
Weight: 126g (L)/126g (R)

SL-R5009-9W

平把公路

速别: 2x9 速
主体材料: 复合塑料
拨杆材料: 复合塑料
视窗指示: 有
重量: 126g(左)/126g(右)



FD-R5009-C-T

With tuning screws
Weight: 134g

配备微调螺丝
重量: 134g

FD-R5009-C

Weight: 130g

Speed: 2S
Mounting: C-Type
Spacer: 31.8-34.9mm
Max gear range: 56T
Capacity: 16T
Chainline: 43.5mm

重量: 130g

速别: 双盘
安装方式: C-Type 低夹环
变径套: 31.8-34.9mm
最大兼容齿数: 56T
齿容量: 16T
链线: 43.5mm



CS-R5

9SP CASSETTE

Size A: 11-12-13-17-19-21-23-25-28T
Size B: 11-13-15-16-17-19-21-23-25T

Cassettes material: Steel
Surface treatment: Nickel plating

飞轮材料: 钢
表面处理: 镀镍

R3

R3 DISC 2x8 SPEED

disc



ST-R4008-L

Speed: 2x8S
Brakes lever: Aluminum
Braking mode: Hydraulic
Weight: 275g (L)/275g (R)

ST-R4008-R

速别: 2x8 速
刹车杆材料: 铝合金
制动方式: 液压
重量: 275g(左)/275g(右)

disc



ST-RS4008-L

Short-reach design

Speed: 2x8S
Brakes Lever: Aluminum
Braking Mode: Hydraulic
Weight: 275g (L)/275g (R)

ST-RS4008-R

短握距

速别: 2x8 速
刹车杆材料: 铝合金
制动方式: 液压
重量: 275g(左)/275g(右)



RD-R5008-M

Speed: 2x8S
Main material: Aluminum
Cage material: Steel
Cage length: Medium (73mm)
Max gear range: 11-32T
Weight: 252g

速别: 2x8 速
主体材料: 铝合金
导板材料: 铁
导板长度: M (轴距: 73mm)
兼容齿数: 11-32T
重量: 252g

RD-R5008-S

Speed: 2x8S
Main material: Aluminum
Cage material: Steel
Cage length: Short (55mm)
Max gear range: 11-32T
Weight: 230g

速别: 2x8 速
主体材料: 铝合金
导板材料: 铁
导板长度: S (轴距: 55mm)
兼容齿数: 11-32T
重量: 230g



BR-R4010-F

Brake type: Disc brake
Main material: Aluminum
Pads: Standard brake pads
Weight: 128g

BR-R4010-R

刹车方式: 碟刹
材质: 铝合金
来令片: 普通来令片
重量: 128g



FD-R5008-D

Speed: 2S
Mounting: D-Type
Max gear range: 56T
Capacity: 16T
Chainline: 43.5mm
Weight: 98g

速别: 双盘
安装: D型, 直装
最大兼容齿数: 56T
齿容量: 16T
链线: 43.5mm
重量: 98g



ST-R5108-2

Speed: 2x8S
Brakes lever: Aluminum
Braking mode: Cable actuation
Weight: 237g (L)/237g (R)

ST-R5108-8

速別: 2x8 速
剎車杆材料: 鋁合金
制動方式: 線拉制動
重量: 237g(左)/237g(右)



ST-R4008-2

ST-R4008-1

Short-reach design

Speed: 2x8S, 1x8S
Brakes lever: Aluminum
Braking mode: Cable actuation
Weight: 184g (L)/241g (R)

ST-R4008-8

短握距

速別: 2x8 速, 1x8 速
剎車杆材料: 鋁合金
制動方式: 線拉制動
重量: 184g(左)/241g(右)



SL-R5008-2W

Flat Bar Road Bike

Speed: 2x8S
Main material: Composite plastic
Lever material: Composite plastic
Window indicator: Yes
Weight: 126g (L)/126g (R)

SL-R5008-8W

平把公路

速別: 2x8 速
主體材料: 複合塑料
撥杆材料: 複合塑料
視窗指示: 有
重量: 126g(左)/126g(右)



FD-R5008-C-T

With tuning screws
Weight: 134g

配備微調螺絲
重量: 134g

FD-R5008-C

Weight: 130g

重量: 130g

Speed: 2S
Mounting: C-Type
Spacer: 31.8-34.9mm
Max gear range: 56T
Capacity: 16T
Chainline: 43.5mm

速別: 雙盤
安裝方式: C-Type 低夾環
變徑套: 31.8-34.9mm
最大兼容齒數: 56T
齒容量: 16T
鏈線: 43.5mm

disc



ST-R4007-L

Speed: 2x7S
Brakes lever: Aluminum
Braking mode: Hydraulic
Weight: 275g (L)/275g (R)

ST-R4007-R

速别: 2x7 速
刹车杆材料: 铝合金
制动方式: 液压
重量: 275g(左)/275g(右)



ST-R5107-2

Speed: 2x7S
Brakes lever: Aluminum
Braking mode: Cable actuation
Weight: 237g (L)/237g (R)

ST-R5107-7

速别: 2x7 速
刹车杆材料: 铝合金
制动方式: 线拉制动
重量: 237g(左)/237g(右)



ST-R4007-2

ST-R4007-1

Short-reach design

Speed: 2x7S, 1x7S
Brakes lever: Aluminum
Braking mode: Cable actuation
Weight: 184g (L)/241g (R)

ST-R4007-7

短握距

速别: 2x7 速, 1x7 速
刹车杆材料: 铝合金
制动方式: 线拉制动
重量: 184g(左)/241g(右)



RD-R5007-M

Speed: 2x7S
Main material: Aluminum
Cage material: Steel
Cage length: Medium (73mm)
Max gear range: 11-28T
Weight: 252g

速别: 2x7 速
主体材料: 铝合金
导板材料: 铁
导板长度: M (轴距: 73mm)
兼容齿数: 11-28T
重量: 252g



FD-R5007-D

Speed: 2S
Mounting: D-Type
Max gear range: 56T
Capacity: 16T
Chainline: 43.5mm
Weight: 98g

速别: 双盘
安装: D 型, 直装
最大兼容齿数: 56T
齿容量: 16T
链线: 43.5mm
重量: 98g



FD-R5007-C-T

With tuning screws
Weight: 134g

配备微调螺丝
重量: 134g

FD-R5007-C

Weight: 130g
Speed: 2S
Mounting: C-Type
Spacer: 31.8-34.9mm
Max gear range: 56T
Capacity: 16T
Chainline: 43.5mm

重量: 130g

速别: 双盘
安装方式: C-Type 低夹环
变径套: 31.8-34.9mm
最大兼容齿数: 56T
齿容量: 16T
链线: 43.5mm



BR-R4010-F

Brake type: Disc brake
Main material: Aluminum
Pads: Standard brake pads
Weight: 128g

BR-R4010-R

刹车方式: 碟刹
材质: 铝合金
来令片: 普通来令片
重量: 128g

GR series

砾石 Gravel Bike

GR 系列是专为砾石自行车 (Gravel Bike) 设计的顶级变速套件系列, 旨在为骑行者提供卓越的操控性、稳定性和适应性, 以应对复杂的砾石路况和长途探险需求。无论是竞速、探险还是长途骑行, GR 系列都能为砾石公路爱好者提供全方位的性能支持。

GR 系列采用符合人体工学的弯把操控方式, 确保骑行者在各种路况下都能轻松实现精准变速, 提升骑行效率。

链条稳链阻尼系统: 后拨搭载的链条稳链阻尼系统, 有效吸收路面颠簸带来的冲击, 减少链条抖动, 防止掉链, 确保骑行过程中的稳定性和可靠性。

The GR series is a top-tier drivetrain system designed specifically for gravel bikes, offering exceptional control, stability, and adaptability to tackle complex gravel terrain and long-distance adventures. Whether for racing, exploration, or endurance rides, the GR series delivers comprehensive performance for gravel enthusiasts.

Featuring an ergonomic drop-bar design, the GR series ensures precise and effortless shifting in all conditions, enhancing riding efficiency.

The Chain Stabilization Damping System on the rear derailleur effectively absorbs shocks from rough terrain, reduces chain vibrations, and prevents chain drops, ensuring stability and reliability throughout the ride.

电子变速 Electronic Shifting

eGR
1x10-12 SPEED

机械变速 Mechanical Shifting

GRT
1x12 SPEED

GR9
1x11 SPEED

GR7
1x10 SPEED

GR5
1x9 SPEED



ST-GR8001-L

Speed: 10-12S
Brakes lever: Aluminum
Braking mode: Hydraulic
Weight: 225g(L)/225g(R)

ST-GR8001-R

速别: 10-12速
刹车杆材料: 铝合金
制动方式: 液压
重量: 225g(左)/225g(右)



RD-GR8001

Damped Chain Stabilizer

Speed: 10-12S
Main material: Aluminum
Cage material: Aluminum
Max gear range: 11-46/50T
Weight: 333g

阻尼稳定系统

速别: 10-12速
主体材料: 铝合金
导板材料: 铝合金
兼容齿数: 11-46/50T
重量: 333g



BR-R6120-F

ONE-PIECE CALIPER

Brake type: Disc brake
Main material: Aluminum
Pads: Egg roll cooling brake pads
Weight: 110g

BR-R6120-R

一体式夹器

刹车方式: 碟刹
材质: 铝合金
来令片: 蛋卷散热来令片
重量: 110g



BT-R9001

Li-ion Battery

Nominal voltage: 7.4V
Charging voltage: 8.4V
Max charging current: 1.5A
Rated capacity: 800mAh 5.92Wh

二次锂电池组

标称电压: 7.4V
充电电压: 8.4V
最大充电电流: 1.5A
额定容量: 800mAh 5.92Wh

GRT DISC Carbon 1x12 SPEED

disc



ST-GR7020-L

Carbon

Speed: 1x12S
Brakes lever: Carbon
Braking mode: Hydraulic
Weight: 180g(L)/255g(R)

ST-GR7020-R

碳纤维

速别: 1x12 速
刹车杆材料: 碳纤维
制动方式: 液压
重量: 180g(左)/255g(右)



RD-GR7020

Carbon
Damped Chain Stabilizer

Speed: 12S
Main material: Aluminum
Cage material: Carbon (Out cage)
Cage length: Long (83mm)
Max gear range: 11-50T
Damping system: Yes
Weight: 268g

碳纤维
阻尼稳定系统

速别: 12 速
主体材料: 铝合金
导板材料: 碳纤维(外导板)
导板长度: L(轴距: 83mm)
兼容齿数: 11-50T
阻尼系统: 有
重量: 268g

GRT DISC Aluminum 1x12 SPEED

disc



ST-GR7010-L

Aluminum

Speed: 1x12S
Brakes lever: Aluminum
Braking mode: Hydraulic
Weight: 200g(L)/275g(R)

ST-GR7010-R

铝合金

速别: 1x12 速
刹车杆材料: 铝合金
制动方式: 液压
重量: 200g(左)/275g(右)



RD-GR7010

Aluminum
Damped Chain Stabilizer

Speed: 12S
Main material: Aluminum
Cage material: Aluminum
Cage length: Long (83mm)
Max gear range: 11-50T
Damping system: Yes
Weight: 285g

铝合金
阻尼稳定系统

速别: 12 速
主体材料: 铝合金
导板材料: 铝合金
导板长度: L(轴距: 83mm)
兼容齿数: 11-50T
阻尼系统: 有
重量: 285g



BR-R7020-F

Brake type: Disc brake
Main material: Aluminum
Pads: Egg roll cooling brake pads
Weight: 128g

BR-R7020-R

刹车方式: 碟刹
材质: 铝合金
来令片: 蛋卷散热来令片
重量: 128g



ST-GR5112-1

Carbon

Speed: 1x12S
Brakes lever: Aluminum
Braking mode: Cable actuation
Weight: 175g (L)/237g (R)

ST-GR5112-12

碳纤维

速别: 1x12 速
刹车杆材料: 铝合金
制动方式: 线拉制动
重量: 175g(左)/237g(右)



RD-GR5012-L

Speed: 12S
Main material: Aluminum
Cage material: Aluminum
Cage length: Long (Wheel base: 83mm)
Max gear range: 11-50T
Damping system: No
Weight: 285g

速别: 12 速
主体材料: 铝合金
导板材料: 铝合金
导板长度: L(轴距: 83mm)
兼容齿数: 11-50T
阻尼系统: 无
重量: 285g



CS-A12

12SP CASSETTE

Size A: 11-13-15-18-21-23-26-30-34-40-46-52T
Size B: 11-13-15-17-19-21-24-28-32-36-42-50T
Size C: 11-13-15-17-19-21-24-28-33-36-40-46T

Cassettes material: Steel
Surface treatment: Nickel plating

飞轮材料: 钢
表面处理: 镀镍

GR9

GR9 DISC Aluminum 1x11 SPEED



ST-GR6010-L

Speed: 1x11S
Brakes lever: Aluminum
Braking mode: Hydraulic
Weight: 200g(L)/275g(R)

ST-GR6010-R

速别: 1x11 速
刹车杆材料: 铝合金
制动方式: 液压
重量: 200g(左)/275g(右)



RD-GR6010

Damped Chain Stabilizer

Speed: 11S
Main material: Aluminum
Cage material: Aluminum
Cage length: Long (83mm)
Max gear range: 11-50T
Damping system: Yes
Weight: 285g

阻尼稳定系统

速别: 11 速
主体材料: 铝合金
导板材料: 铝合金
导板长度: L(轴距: 83mm)
兼容齿数: 11-50T
阻尼系统: 有
重量: 285g



BR-R6020-F

Brake type: Disc brake
Main material: Aluminum
Pads: Egg roll cooling brake pads
Weight: 128g

BR-R6020-R

刹车方式: 碟刹
材质: 铝合金
来令片: 蛋卷散热来令片
重量: 128g

GR9 1x11 SPEED



ST-GR5111-1

Speed: 1x11S
Brakes lever: Aluminum
Braking mode: Cable Actuation
Weight: 175g (L)/237g (R)

ST-GR5111-11

速别: 1x11 速
刹车杆材料: 铝合金
制动方式: 线拉制动
重量: 175g(左)/237g(右)



RD-GR5011-L

Speed: 11S
Main material: Aluminum
Cage material: Aluminum
Cage length: Long (83mm)
Max gear range: 11-50T
Damping system: No
Weight: 285g

ST-GR5111-11

速别: 11 速
主体材料: 铝合金
导板材料: 铝合金
导板长度: L(轴距: 83mm)
兼容齿数: 11-50T
阻尼系统: 无
重量: 285g



CS-A11

11SP CASSETTE

Size A: 11-13-15-18-21-23-26-30-34-40-46T
Size B: 11-13-15-19-21-24-28-32-36-42-50T

Cassettes material: Steel
Surface treatment: Nickel plating

飞轮材料: 钢
表面处理: 镀镍

GR7

GR7 DISC 1x10 SPEED

disc



ST-GR5010-L

Speed: 1x10S
Brakes lever: Aluminum
Braking mode: Hydraulic
Weight: 200g (L)/275g (R)

ST-GR5010-R

速别: 1x10 速
刹车杆材料: 铝合金
制动方式: 液压
重量: 200g(左)/275g(右)



RD-GR5010

Damped Chain Stabilizer

Speed: 10S
Main material: Aluminum
Cage material: Aluminum
Cage length: Long (83mm)
Max gear range: 11-46T
Damping system: Yes
Weight: 340g

阻尼稳定系统

速别: 10 速
主体材料: 铝合金
导板材料: 铝合金
导板长度: L(轴距: 83mm)
兼容齿数: 11-46T
阻尼系统: 有
重量: 340g



BR-R5010-F

Brake type: Disc Brake
Main material: Aluminum
Pads: Egg roll cooling brake pads
Weight: 128g

BR-R5010-R

刹车方式: 碟刹
材质: 铝合金
来令片: 蛋卷散热来令片
重量: 128g

GR7 1x10 SPEED



ST-GR5110-1

Speed: 1x10S
Brakes lever: Aluminum
Braking mode: Cable actuation
Weight: 175g (L)/241g (R)

ST-GR5110-10

速别: 1x10 速
刹车杆材料: 铝合金
制动方式: 线拉制动
重量: 175g(左)/241g(右)



RD-GR5010-L

Speed: 10S
Main material: Aluminum
Cage material: Aluminum
Cage length: Long (83mm)
Max gear range: 11-46T
Damping system: No
Weight: 345g

速别: 10 速
主体材料: 铝合金
导板材料: 铝合金
导板长度: L(轴距: 83mm)
兼容齿数: 11-46T
阻尼系统: 无
重量: 345g



CS-A7

10SP CASSETTE

Size A: 11-13-15-18-21-24-30-36-40-42T
Size B: 11-13-15-18-21-24-28-34-42-46T

Cassettes material: Steel
Surface treatment: Nickel plating

飞轮材料: 钢
表面处理: 镀镍

disc



ST-GR4009-L

Speed: 1x9S
Brakes lever: Aluminum
Braking mode: Hydraulic
Weight: 200g (L)/275g (R)

ST-GR4009-R

速别: 1x9 速
刹车杆材料: 铝合金
制动方式: 液压
重量: 200g(左)/275g(右)



ST-GR5109-1

Speed: 1x9S
Brakes lever: Aluminum
Braking mode: Cable actuation
Weight: 175g (L)/237g (R)

ST-GR5109-11

速别: 1x9 速
刹车杆材料: 铝合金
制动方式: 线拉制动
重量: 175g(左)/237g(右)



RD-GR5011-L

Speed: 9S
Main material: Aluminum
Cage material: Aluminum
Cage length: Long (83mm)
Max gear range: 11-50T
Damping system: No
Weight: 285g

速别: 9 速
主体材料: 铝合金
导板材料: 铝合金
导板长度: L(轴距: 83mm)
兼容齿数: 11-50T
阻尼系统: 无
重量: 285g



BR-R4010-F

Brake type: Disc Brake
Main material: Aluminum
Pads: Standard brake pads
Weight: 128g

BR-R4010-R

刹车方式: 碟刹
材质: 铝合金
来令片: 普通来令片
重量: 128g

Ae series

Ae 电子拉线器是一款创新的自行车变速升级组件，通过电子控制技术将机械变速系统转变为电子变速系统，提供更高效、精准的操控体验。

核心功能：

智能信号传输：通过电子控制器发送信号至主机，实现精准变速，消除机械线缆摩擦，使变速更快速、流畅。

兼容性强：支持 3-13 速，兼容市面所有主流变速器，无需更换整套套件，降低成本。

简易安装：设计简洁，安装方便，无需专业工具或技术，快速享受电子变速的便利。

Ae Electronic Wire Puller

The Ae Electronic Wire Puller upgrades mechanical shifting to electronic, offering precise and efficient control.

Key Features:

Smart Signal Transmission: Enables fast, smooth shifting by eliminating cable friction.

High Compatibility: Works with 3-13 speed various mechanical systems, reducing upgrade costs.

Easy Installation: Simple setup with no specialized tools needed.





Ae 3-13 SPEED Electronic Cable Puller



ES-E6001

Speed: 3-13S
Control method: Electronic pull wire
Main material: Composite material
Compatibility: All brands
Color: Black
Weight: 65g (Without battery)

速别: 3-13 速
控制方式: 电子拉线
主体材料: 复合塑料
兼容性: 所有品牌
颜色: 黑色
重量: 65g(不含电池)



SL-E6001

Speed: 3-13S
Control method: Wireless
Main material: Aluminum
Color: Optional
Weight: 50g

速别: 3-13
速控制方式: 无线主体
材料: 铝合金
颜色: 可选
重量: 50g

FOLDING BIKE

蓝图针对折叠车的特殊需求，通过创新的技术和精心的设计，为折叠车提供了高效、可靠且轻量化的变速系统，全面满足折叠车用户的多样化需求。

LTWOO Addresses the unique needs of folding bikes by providing efficient, reliable, and lightweight drivetrain systems through innovative technology and thoughtful design, fully meeting the diverse demands of folding bike users.



Triple Fold Rear Derailleur 三折后拨



RD-F5009-LXX

Speed: 8-10S
Main material: Aluminum
Cage material: Composite plastic
Max gear range: 11-28T
Weight: 280g

速别: 8-10 速
主体材料: 铝合金
导板材料: 复合塑料
兼容齿数: 11-28T
重量: 280g



RD-F5005-LXX

Speed: 5-7S
Main material: Aluminum
Cage material: Composite plastic
Max gear range: 11-28T
Weight: 280g

速别: 5-7 速
主体材料: 铝合金
导板材料: 复合塑料
兼容齿数: 11-28T
重量: 280g

Chain Tensioner 张链器



CT-Z550

Speed: Single
Main material: Aluminum
Max gear range: 11-28T
Cage material: Steel
Compatibility: Single speed
Pulley material: Composite material
Weight: 175g

速别: 单速
主体材料: 铝合金
兼容齿数: 11-28T
导板材料: 钢
兼容性: 外置单速
导轮材料: 复合塑料
重量: 175g

3 SPEED 外3速



SL-V5003-W

Speed: 3S
Main material: Composite plastic
Lever material: Composite plastic
Window indicator: No
Weight: 138g

速别: 3 速
主体材料: 铝合金
拨杆材料: 复合塑料
视窗指示: 无
重量: 138g



RD-V5003-W

Speed: 3S
Main material: Aluminum
Cage material: Steel
Max gear range: 11-28T
Weight: 236g

速别: 3 速
主体材料: 铝合金
导板材料: 铁
兼容齿数: 11-28T
重量: 236g

5 SPEED 外 5 速



SL-V5005-W

Speed: 5S
Main material: Aluminum
Lever material: Composite plastic
Window indicator: No
Weight: 138g

速别: 5 速
主体材料: 铝合金
拨杆材料: 复合塑料
视窗指示: 无
重量: 138g



RD-V5005-W

Speed: 5S
Main material: Aluminum
Cage material: Steel
Max gear range: 11-28T
Weight: 240g

速别: 5 速
主体材料: 铝合金
导板材料: 铁
兼容齿数: 11-28T
重量: 240g

Grip Shifter 6 SPEED 转把



SL-RS5006-6W

Speed: 6S
Main material: Composite plastic
Window indicator: Optional
Weight: 98g

速别: 6 速
主体材料: 复合塑料
视窗指示: 可选
重量: 98g



RD-V4006-M-2

Speed: 6S
Main material: Composite plastic
Cage material: Steel
Cage length: Medium (75mm)
Max gear range: 11-32T
Weight: 247g

速别: 6 速
主体材料: 复合塑料
导板材料: 铁
导板长度: M (轴距: 75mm)
兼容齿数: 11-32T
重量: 247g

Grip Shifter 7 SPEED 转把



SL-RS5007-7W

Speed: 7S
Main material: Composite plastic
Window indicator: Optional
Weight: 98g

速别: 7 速
主体材料: 复合塑料
视窗指示: 可选
重量: 98g



RD-V4007-M-2

Speed: 7S
Main material: Composite plastic
Cage material: Steel
Cage length: Medium (75mm)
Max gear range: 11-32T
Weight: 247g

速别: 7 速
主体材料: 复合塑料
导板材料: 铁
导板长度: M (轴距: 75mm)
兼容齿数: 11-32T
重量: 247g

Grip Shifter 8 SPEED 转把



SL-RS5008-8W

Speed: 8S
Main material: Composite plastic
Window indicator: Optional
Weight: 98g

速别: 8 速
主体材料: 复合塑料
视窗指示: 可选
重量: 98g(右)



RD-V4008-M-2

Speed: 8S
Main material: Composite plastic
Cage material: Steel
Cage length: Medium (75mm)
Max gear range: 11-32T
Weight: 247g

速别: 8 速
主体材料: 复合塑料
导板材料: 铁
导板长度: M (轴距: 75mm)
兼容齿数: 11-32T
重量: 247g

8-10 SPEED 推荐组合

10 SPEED R5010 系列



+



+



9 SPEED R5009 系列



+



+



8 SPEED R5008 系列



+




+



TOOLS

工具



TL-BR0001

Funnel
Funnel blockage
Hose
Oil injection syringe
Copper ring fixing tool
Funnel adapter

漏斗
漏斗堵塞
软管
注油针筒
铜环固定工具
漏斗接头

L-TWOO

珠海蓝图运动科技股份有限公司
ZHUHAI L-TWOO SPORT TECHNOLOGY CO.,LTD

地址：
中国广东省珠海市金湾区三灶镇定湾三路 296 号

Address :
No 296, DingWan 3rd Road, Sanzao , Jinwan District,
Zhuhai City, Guangdong Province, China

E-mail: sales@ltwoo.com
Tell: +86 0756 7795890
www.ltwoo.com

